

Be Survey Ready

Don't risk non-compliance

Portable Fire-Fighter radios required for surveys after 1st July, 2018

To Order:

1360227 403965A-00500
SAILOR 3965 UHF Fire Fighter Handheld

SOLAS Chapter II-2, regulation 10.10.4

For ships constructed on or after 1 July 2014, a minimum of two two-way portable radiotelephone apparatus for each fire party for fire-fighter's communication shall be carried on board.

Those two two-way radiotelephone apparatuses shall be of an explosion-proof type or intrinsically safe. Ships constructed before 1 July 2014 shall comply with the requirements of this paragraph not later than the first survey after 1 July 2018.


Taking safety to higher standards

The robust and explosion proof SAILOR 3965 UHF Fire Fighter radio fulfils the IEC 60945 marine standards to ensure.


APPROVALS	
R&TTE	X
ATEX	Class II 2G Ex ib IIB T4
Marine approval	IEC60945
CHANNELS AND FREQUENCIES	
Frequency range	440 - 470 MHz
Channel Separation	25kHz/12.5kHz
Pre-programmed channels	16
Additional programmable channels	85
ATIS call sign channels	X



SAILOR 3965 UHF Fire Fighter

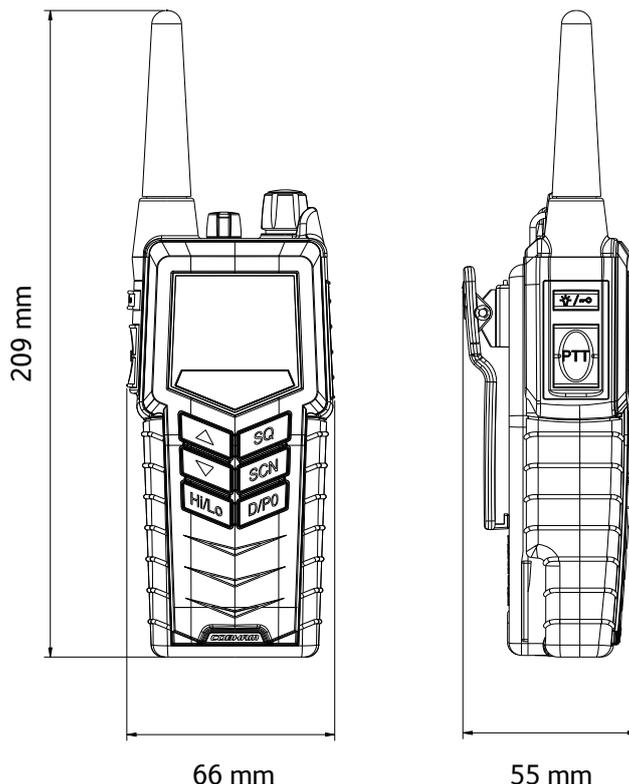

SAILOR CH 3505 Single Charger Unit

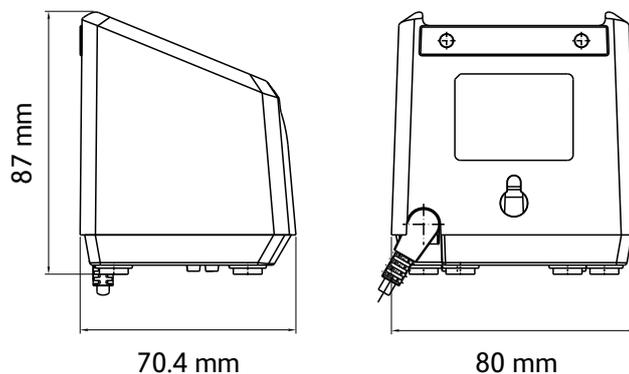

Marine International Pte Ltd

AMI Singapore Office

P: +65 6775 0081

F: +65 6779 7856

E: singapore@amisales.com.sg

Blk 196 Pandan Loop #4-15

Pantech Business Hub

Singapore, 128384

www.amisales.com.sg

Sailor 3965 UHF Fire Fighter Connection of Accessories



403900-942 SAVOX C-C440 Push-To-Talk

Direct →



Direct →



403500-944 SAVOX C-C500 Remote Speaker Microphone

Direct →



403500-005 SAVOX HC-1, Helmet unit



403500-004 SAVOX HC-E, Helmet unit



Direct →



Direct →



403900-953 Adaptor cable for PELTOR headset, ATEX

403900-953 Adaptor cable for PELTOR headset, ATEX

PELTOR ATEX HEADSETS



403900-952 PELTOR FL-5261B Push-To-Talk

Direct →



Direct →

